



features . . . . .

- **Description:** The solid copper vertical bar with lacing slots is for proper grounding of connected equipment in rackmount applications. The bar is available in two sizes (36" or 72").
- **Construction:**
  - 1/8" thick copper bar for grounding connected equipment in racks
  - 10-32 tapped holes on E.I.A. spacing along one side
  - Includes wide array of lacing slots and tie-down points for organized wire management. Holes (0.312" diameter) and obrounds (0.375" x 1.5" and 0.375" x 3")
  - Available in two sizes: 36" long (Model #GBB-36) and 72" long (Model #GBB-72)
- **Hardware:** 1/4-20 x 5/8" screws, insulation washers, and slide nuts
- **Origin:** Made in the U.S.A.

a&e specifications . . . . .


The solid copper grounding bus bar for vertical rackmount use shall be Lowell Model \_\_\_\_\_ (#GBB-36, #GBB-72), which shall measure \_\_\_\_\_ (36"L x 2"W, 72"L x 2"W). The bar shall have 10-32 tapped holes (0.312" diameter) and obround slots (0.375" x 1.5" and 0.375" x 3"). The bar shall include installation hardware.

GBB series summary

Model. No.	Description	Length	Width	Weight	For Rack Height*
GBB-36	Grounding bus bar, copper	36" [914 mm]	2" [51 mm]	4 lbs. [1.8 kg]	19-44U
GBB-72	Grounding bus bar, copper	72" [1829 mm]	2" [51 mm]	8 lbs. [3.6 kg]	44U

\* One rack unit (RU or U) = 1.75" [44.45 mm]



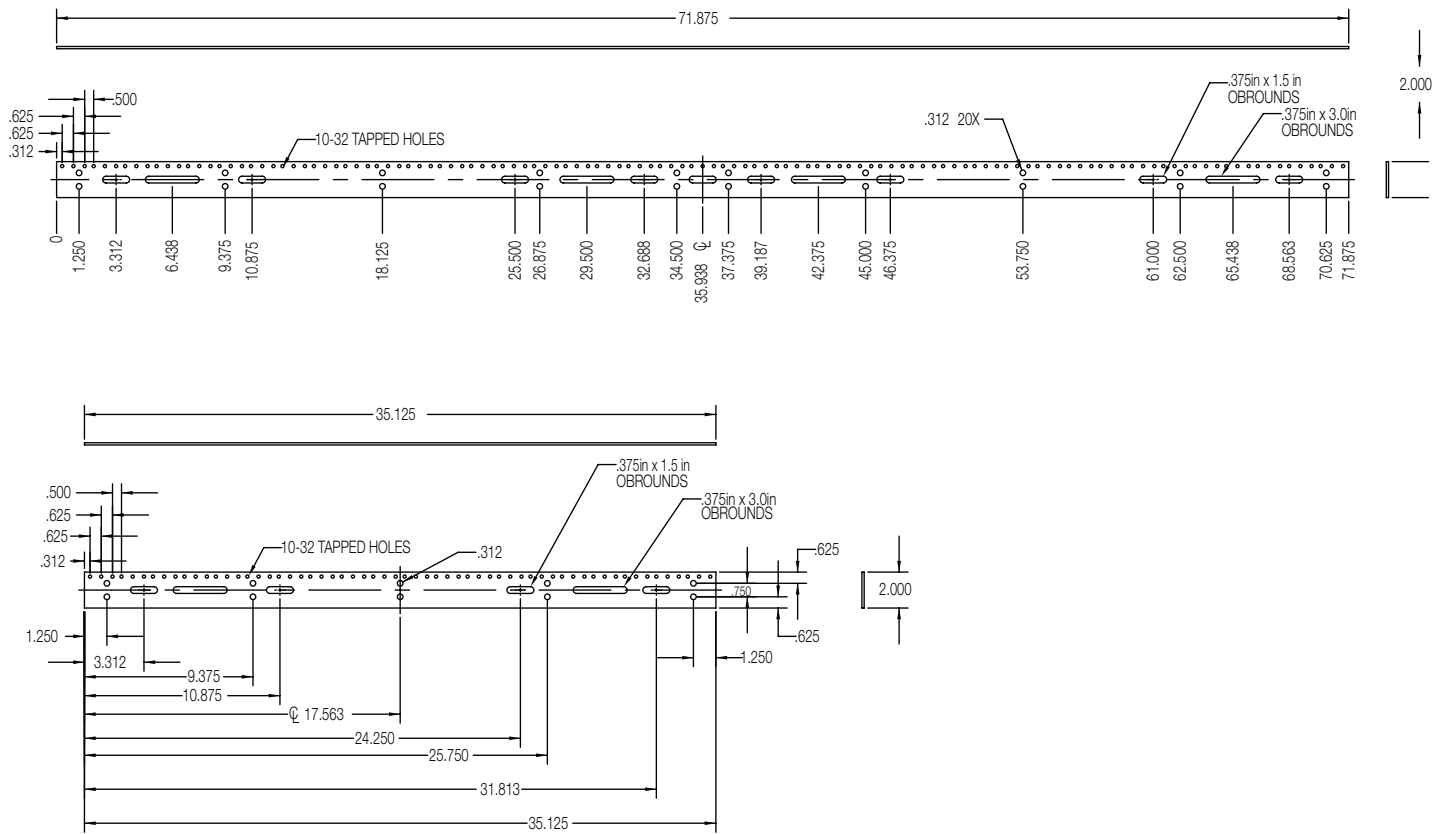

### mounting instructions . . . . .

