
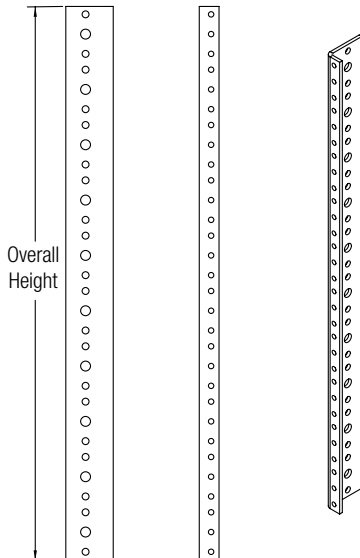


RRT series rails are tapped to accept threaded 10-32 screws (RRT-24 shown).



The RRT Series of mounting rails were designed to accommodate 19.062" [484mm] openings in custom millwork. The rails are tapped to accept threaded 10-32 screws for mounting accessories to rack front. The opposite side of rail can be used to manage wires and cables. Rails are made from sturdy 11-gauge steel and have a black powder epoxy finish with a printed scale showing rack unit increments to facilitate set-up.

### FEATURES

- **Material:** 11-gauge, 100% certified US steel
- **Finish:** Black powder epoxy finish
- **Origin:** Made in the USA
- **For Use In:** 19.062"W [484mm] openings in custom millwork
- **Quantity:** Sold in pairs

### A & E SPECIFICATIONS

Rack rails for use in custom millwork shall be Lowell Model \_\_\_\_\_ (see chart). The rails shall be fabricated from 11 gauge steel and have a black powder epoxy finish. Each rail shall measure \_\_\_\_\_ (see chart) rack units and be tapped on one side to accept threaded 10-32 screws (not included). Rails shall also feature a printed scale showing rack unit increments.

**NOTE:** Mounting hardware is not included with RRT Series rails.

### RRT SERIES SUMMARY

Model No.	Description	Hardware Included	Overall Height in [mm]	RU	Quantity
RRT-7	Rack Rails, thin-flange	---	12.25 [311]	7U	1-pr.
RRT-10	Rack Rails, thin-flange	---	17.50 [445]	10U	1-pr.
RRT-12	Rack Rails, thin-flange	---	21.00 [533]	12U	1-pr.
RRT-14	Rack Rails, thin-flange	---	24.50 [622]	14U	1-pr.
RRT-16	Rack Rails, thin-flange	---	28.00 [711]	16U	1-pr.
RRT-21	Rack Rails, thin-flange	---	36.75 [933]	21U	1-pr.
RRT-24	Rack Rails, thin-flange	---	42.00 [1067]	24U	1-pr.
RRT-28	Rack Rails, thin-flange	---	49.00 [1245]	28U	1-pr.
RRT-30	Rack Rails, thin-flange	---	52.50 [1334]	30U	1-pr.
RRT-32	Rack Rails, thin-flange	---	56.00 [1422]	32U	1-pr.
RRT-40	Rack Rails, thin-flange	---	70.00 [1778]	40U	1-pr.
RRT-46	Rack Rails, thin-flange	---	80.50 [2045]	46U	1-pr.

One rack unit (RU or U) = 1.75 inches or 44.45 mm.

