


Model No.

TLM-3270A

High Performance Line Matching Transformer



THE HIGH PERFORMANCE LINE MATCHING TRANSFORMER has a frequency response of 50Hz – 15kHz (± 1 dB) and features color coded leads.

FEATURES




- Primary Voltage: 70V
- Power Rating: 32W
- Primary Taps: 32, 16, 8W
- Secondary Impedance: 8, 4 ohms
- Frequency Response: 50Hz–15kHz (± 1 dB)
- Leads: Color coded
- Lead Length: 18 inches

A&E SPECIFICATIONS

The line matching transformer shall be Lowell model TLM-3270A. Primary voltage shall be 70V with a power rating of 32 watts. Primary taps shall be available at 32, 16, and 8 watts. Secondary impedance taps shall be available at 8 ohms and 4 ohms. All taps shall have clearly marked color coded leads. Frequency response of the transformer shall be 50Hz–15kHz (± 1 dB) with insertion loss not to exceed 0.77 dB.

TECHNICAL DRAWINGS:

Dimensions are inches unless stated otherwise.

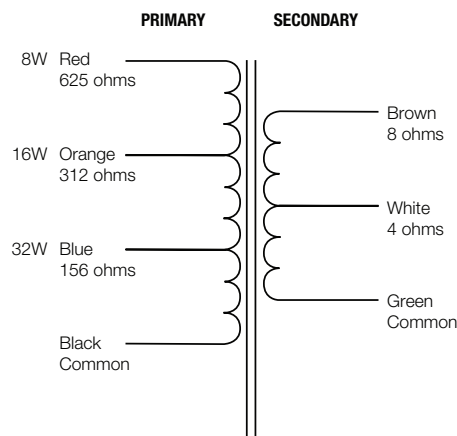

SERIES SUMMARY:

Model No.	Primary Voltage	Power Rating	Primary Taps	Secondary Impedance	Core Size (in)	Insertion Loss	Frequency Response	Lead Length (in)	Weight (lbs)
TLM-1670B	70V	16W	16, 8, 4W	8, 4 ohms	.875 x 1.25	.76 dB	50Hz-15kHz (± 1 dB)	18	2.1
TLM-3270A	70V	32W	32, 16, 8W	8, 4 ohms	1 x 1.5	.77 dB	50Hz-15kHz (± 1 dB)	18	3.2
TLM-10070A	70V	100W	100, 64, 32, 16W	8, 4 ohms	1.25 x 1.25	.6 dB	50Hz-15kHz (± 1 dB)	18	4.45

NOTE: Special adaptors are available that allow the TLM-1670B to be mounted to Lowell 4" and 8" drivers. Call for information.

THIS SPEC