




Three piece shelf can be installed to emulate 2U or 3U panel space.

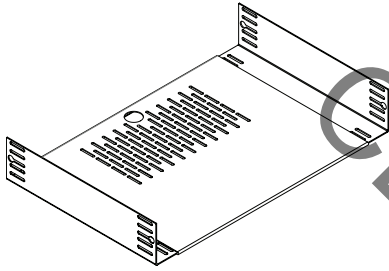

### features . . . . .

- Overall Height: 3.50" or 5.25" (2U or 3U)
- Overall Width: 17.50"–22.00" [445–559]
- Overall Depth: 14.00" [356]
- Description: Versatile rack shelf mounts behind front rack rails to support equipment that's wider than standard rail clearance of 17.813" (19"W rack).
- Construction:
  - Three-piece shelf expands from 17.5"–22"W to provide extra mounting width behind rack rails.
  - Side supports (L-brackets) can be installed with long or short side up to emulate 2U or 3U panel space.
  - Certified U.S. steel with smooth black finish (16-gauge center section, 14-gauge side supports). Sections assemble without hardware.
  - Vented base
- Mounting:
  - For racks 21U and taller
  - Mounts behind front rack rails (screws into holes on inside angle of rails) using 2 standard rack screws with nuts on inside slots of each side.
- Side slots also have a keyhole opening that can be used to mount a single "set screw" on each side before mounting the shelf, allowing the shelf to be supported and then pulled forward and secured using 2 screws per side.
- Shelf and equipment should be mounted before other rack accessories to provide ample room for maneuvering equipment.
- Cable Management: Cable access opening.
- Load Capacity: 50 lbs. The assembly can also mount to rear rails to accommodate heavier equipment.
- Hardware: 10-32 mounting screws with nuts.
- Origin: Made in the U.S.A.

### a&e specifications . . . . .

The rackmount shelf shall be Lowell Model #VWS-214 which shall have an adjustable width of 17.50"–22.00", 14.00" depth, and panel space of 2U or 3U depending on how it's assembled. Load capacity shall be 50 lbs. The shelf shall include provisions for cable entry and wire lacing.

Construction shall be certified U.S. steel with smooth black powder epoxy finish (16-gauge center section, 14-gauge side supports). The shelf shall include 10-32 mounting screws with nuts.

#### VWS series summary

Model No.	Panel Space	Rack Units	Overall Depth	Usable Width	Load Capacity
<b>VWS-214</b>	<b>3.5 or 5.25 [89 or 133]</b>	<b>2U or 3U</b>	<b>14.00 [356]</b>	<b>17.50-22.00 [445-559]</b>	<b>50 lbs. [22 kg]</b>
VWS-218	3.5 or 5.25 [89 or 133]	2U or 3U	18.00 [457]	17.50-22.00 [445-559]	50 lbs. [22 kg]

Dimensions = inches [mm]; 1U = 1.75"



