



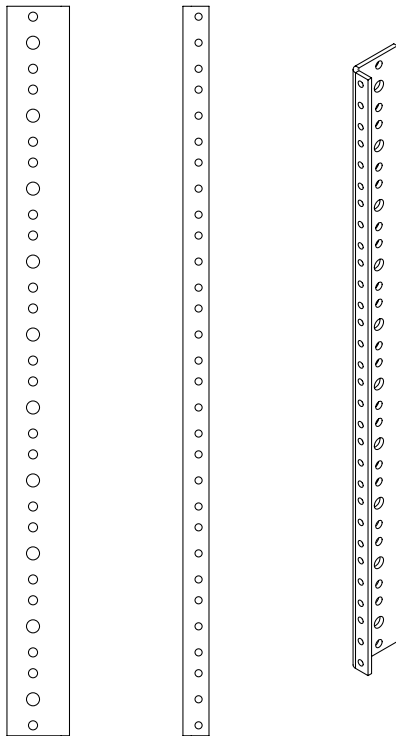

RRTF series rails are tapped to accept threaded 10-32 screws (RRTF-7 shown).



The RRTF Series rails are tapped to accept threaded 10-32 screws for mounting accessories to rack front. The opposite side of rail can be used to manage wires and cables. Rails are made from sturdy 11-gauge steel and have a black powder epoxy finish with a printed scale showing rack unit increments to facilitate set-up.

### FEATURES

- For use with Lowell rack series LDSR, LDTR, LWER, LWSR
- 11-gauge steel
- Black powder epoxy finish
- Made in the USA with 100% certified US steel
- Sold in pairs
- Includes mounting hardware

### A & E SPECIFICATIONS

Rack rails shall be Lowell Model \_\_\_\_\_. The rails shall be fabricated from 11 gauge steel and have a black powder epoxy finish. Each rail shall measure \_\_\_\_\_ rack units and be tapped on one side to accept threaded 10-32 screws. The rails shall also feature a printed scale showing rack unit increments.

**NOTE:** Rail conversion bracket (Model RRTBF) may be required to mount these as a second set of rails on some racks; see spec sheets and order separately as needed.

### RRTF SERIES SUMMARY

Model No.	Description	Hardware Included	Overall Height in [mm]	RU	Quantity
RRTF-7	Rack Rails with Thin-flange	Yes	12.25 [311]	7U	1-pr.
RRTF-10	Rack Rails with Thin-flange	Yes	17.50 [445]	10U	1-pr.
RRTF-12	Rack Rails with Thin-flange	Yes	21.00 [533]	12U	1-pr.
RRTF-14	Rack Rails with Thin-flange	Yes	24.50 [622]	14U	1-pr.
RRTF-16	Rack Rails with Thin-flange	Yes	28.00 [711]	16U	1-pr.

One rack unit (RU or U) = 1.75 inches or 44.45 mm.

