



DESCRIPTION:

Power supply is for use with Lowell's RY Series relays, priority type attenuators and other general purpose applications.

FEATURES:

- Universal input (100-240 VAC)
- Output 24 VDC (500mA)
- For use with Lowell RY Series relays and priority type attenuators
- Measures 3"H x 1.5"W x 2"D
- Includes four plug adaptors:
 - NEMA 1-15 for North America (installed)
 - CEE 7/16 for central Europe
 - BS 1363 for the United Kingdom
 - AS 3112 for Australia, New Zealand
- Plugs can be easily switched in the field using the slide-out design. A tab secures the plug in position.
- UL Listed

A & E SPECIFICATIONS:

The power supply shall be Lowell Model No. PS2405, which shall include four plug adaptors — NEMA 1-15 for use in North America, CEE 7/16 for use in central Europe, BS 1363 for use in the U.K. and AS 3112 for use in Australia/New Zealand. The power supply shall have input of 100-240 VAC 50/60Hz (0.5A max.). The output shall be 24 VDC (500mA).

Series summary


Model No.	Description	Input	Outputs (nominal)	Ripple @ Full Load	Overcurrent Protection	Length	Width	Height	Weight
<i>This spec</i> ▶ PS2405	Power supply w/adaptors	100-240VAC 50/60Hz 0.5A max	24VDC (500mA)	---	Internal	2"	1.5"	3"	< 1 lb.
PS5124	Mutli-output power supply	100-240VAC 50/60Hz 2.1A max	5VDC @4A 12VDC @2A 24VDC @1A	<1%	circuit breaker	7.5"	3.25"	3.625"	4 lbs.




TECHNICAL:

INPUT:

100VAC – 240VAC
50/60 Hz. 0.5A max

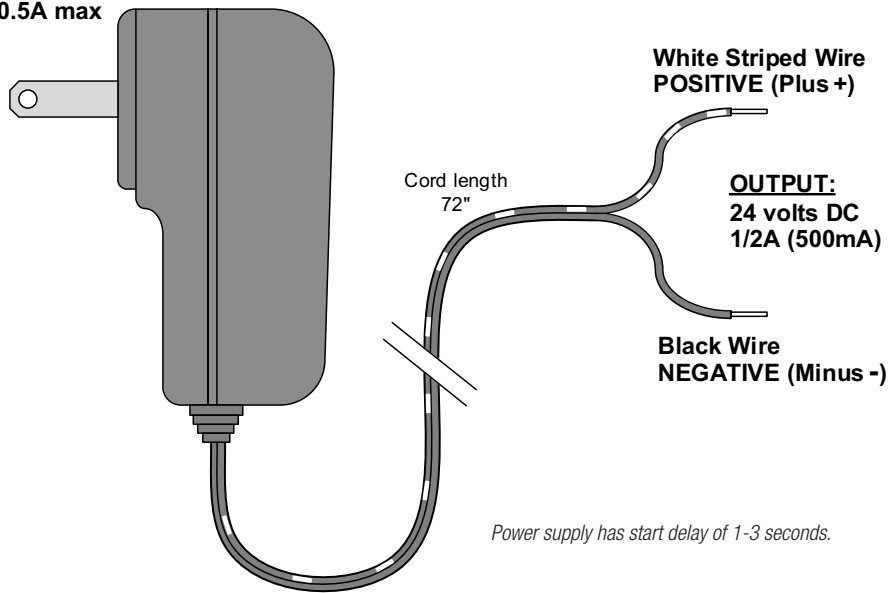

Includes 4 adaptors:

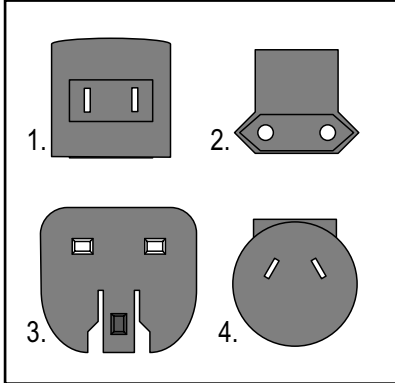

1. North American NEMA 1-15 (factory installed)
2. Central European CEE 7/16
3. U.K. British BS 1363
4. Australia/New Zealand AS 3112

Easy adaptor change:

