

## Model No.


# RMK3-18-LFP

## Rackmount Shelf

Shelf with vented base, L-brackets and mounting hardware to provide professional installation of non-rackmount equipment up to 17.375" wide.

### Construction & Features

- Sturdy 14-gauge steel construction
- Hinged sides for cost-effective shipping, fast installation
- 19"W x 18"D x 3U
- Bottom vents
- Side openings for cable management
- Load capacity 50 lbs.
- Black powder epoxy finish
- Made in the U.S.A. with certified U.S. steel

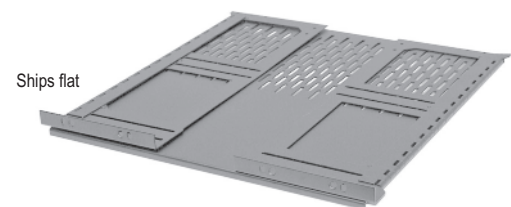

### Installation

Secure equipment to shelf using four L-brackets (typically two on top front and two on bottom rear vents to keep equipment from being pushed back during use).

### Optional (order separately)

- **RMK-TCMP:** 17.35"W top clamp secures equipment less than 16.125" wide.




### A&E Specifications

The 19"W steel shelf for mounting non-rackmount equipment shall be Lowell Model No. RMK3-18-LFP with a depth of 18" and panel space of 3 rack units. The shelf shall be 14-gauge steel construction with a load capacity of 50 lbs. The unit shall feature a black powder epoxy finish.

### Model Number


| Model No.   | Description        | Rack Units | Panel Space      | Depth          | Shipping Weight |
|-------------|--------------------|------------|------------------|----------------|-----------------|
| RMK3-18-LFP | Rackmount shelf    | 3          | 5.25 in / 133 mm | 18 in / 457 mm | 14 lbs / 6.3 kg |
| RMK-TCMP    | Optional top clamp |            |                  |                |                 |

Heard Everywhere Since 1947

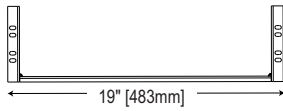

Top mounted L-brackets secure equipment that's wider than 16.125" [410mm].

Rear mounted L-brackets keep equipment from being pushed back.



Optional top clamp secures equipment less than 16.125"W [410mm]

