

Model No.

LT2-830-TM16-VB

Lay-in Tile Ceiling Loudspeaker

INCLUDES:

- 8-inch 20W coaxial driver
- 70V 16W transformer
- 2x2 grille with subplate
- 0.8-cu.ft. enclosure



LT SERIES SPEAKERS are pro systems made for quick installation in suspended lay-in tile ceilings. The 2x2 assembly replaces a 2x2 ceiling tile. This model features an 8-inch 20W coaxial driver, 70V 16W transformer, 2x2 grille with subplate and 0.8-cu.ft. backbox.

FEATURES

PERFORMANCE: This model is ideal for applications providing foreground music.

DRIVER (CT830A): 8-inch 20W coaxial driver with 3-inch tweeter that provides wide dispersion in the high frequency range to enhance intelligibility in the area between speakers. Outstanding choice for quality paging, public address, and background music applications demanding accurate voice and music reproduction.

- Precision ground, highly efficient ceramic magnets (12 oz. LF, 2.1 oz. HF) and permanently aligned voice coils to achieve outstanding smoothness and intelligibility
- Driver weight: 2.4 lbs.
- Driver depth: 3.2 in.

TRANSFORMER: Factory-wired 70V transformer with primary taps at 4, 8 and 16W.

GRILLE WITH SUBPLATE (2X2): Fine-perforation steel grille with white powder epoxy finish is designed to provide maximum free-air space for excellent sound transmission, while maintaining an unobtrusive appearance in new or existing lay-in tile ceilings. Includes black subplate and four restraint tabs for code compliance.

- The 2x2 (23.75-in. x 23.75-in.) grille assembly replaces a 2x2 ceiling tile.

ENCLOSURE: Certified U.S. steel enclosure with black powder epoxy finish.

- Volume: 0.8 cu.ft.
- Enclosure is offset on the 23.75-in. x 23.75-in. grille assembly to accommodate plenum obstructions.
- 1.5-inch thick acoustic lining

INSTALLATION:


- Assembly Dimensions: 23.75-in.L x 12.92-in.W x 7-in.H
- Restraint Tabs: The assembly features four restraint tabs for code compliance tie-offs.
- Connections: Driver leads exit enclosure through a metal clamp for fast connections — just splice connecting wires, push inside the enclosure, and tighten clamp.

COMPLIANCE & CERTIFICATIONS:

- Made in the U.S.A. with certified U.S. steel and global components.






FEATURES

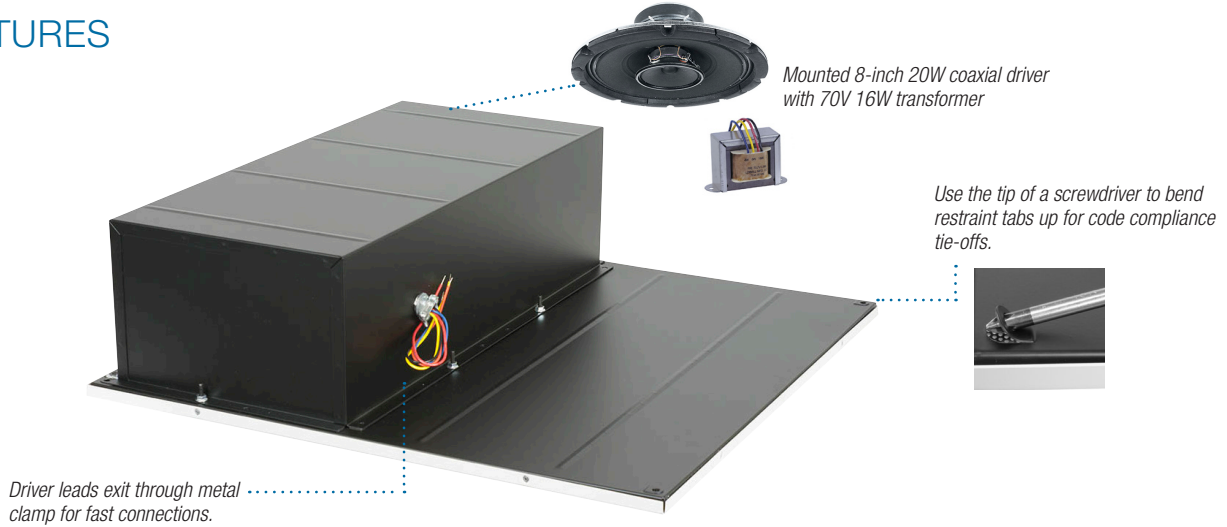

TECHNICAL DRAWINGS

Dimensions are provided in inches.

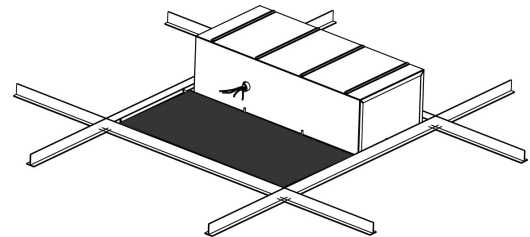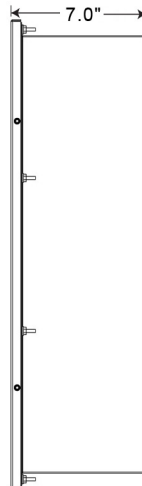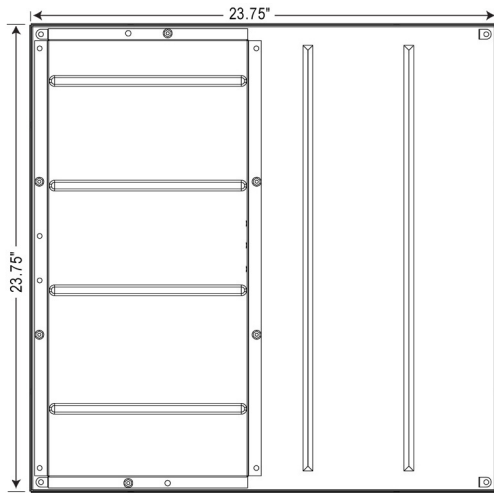

The enclosure is offset on the 2x2 grille assembly to accommodate plenum obstructions.

DRIVER SPECIFICATIONS

Driver No.	Size	Power Rating	Type	Ceramic Magnet	Frequency Response	Dispersion @ 2000Hz(-6dB)	Voice Coil Impedance	Voice Coil Diameter	Sensitivity 1W/1M	Max SPL*	Driver Depth	Driver Weight
CT830A	8 in.	20W	coaxial	12 oz.	57Hz-14kHz (±6dB) 44Hz-20kHz (±7.6dB)	80 degrees conical	8 ohms	1 in.	97.0dB avg.	110.0dB	3.2 in.	2.4 lbs.

*Calculated value 1M @ driver power rating. See spec sheet for driver CT830A for additional information.


TEST METHODOLOGIES: Lowell speaker systems are thoroughly tested to provide specifiers and contractors with accurate data. Test equipment includes the Gold-Line TEF-20 analyzer.

- **POWER HANDLING:** specification is based on E.I.A. Standard RS-426B.
- **FREQUENCY RESPONSE:** describes the usable response range defined by a ± 6dB window, which is useful in predictive engineering calculations.
- **SENSITIVITY:** is a computer calculation of the log average sound pressure level (SPL) over the entire engineering bandwidth as given in the Frequency Response (± 6dB).
- **MAXIMUM SPL:** is calculated based on the Power Handling and the measured log average Sensitivity where Maximum SPL = (Sensitivity @ 1W/1M) + 10 log (Power Handling).
- **DISPERSION ANGLE:** is defined as the angle of coverage that is no more than 6dB down from the on-axis value averaged over the 2kHz octave band. Since speech intelligibility is dependent upon the 2kHz octave, this specification is useful in designing voice reinforcement and music systems that provide even coverage and intelligibility. The polar plots illustrate how the system performs when hung in free space (360°) or half-space (180°) in the case of a recessed speaker.

A&E SPECIFICATIONS

The loudspeaker to mount in a suspended lay-in tile ceiling shall be Lowell Model No. LT-830-TM16-VB. The 2x2 assembly shall replace a 2x2 ceiling tile. Each assembly shall include a factory-mounted driver with 70V transformer (primary taps at 4, 8 and 16W), mounted to a 2x2 black subplate and fine perforation steel grille with white powder epoxy finish. The driver shall be 8-inch coaxial with 20W power rating featuring ceramic magnet weight of 12 ozs., 80 degrees conical dispersion @2kHz octave (-6dB), frequency response of 57Hz-14kHz (± 6 dB), 44Hz-20kHz (± 7.6 dB) and average sensitivity of 97.0dB measured 1W/1M. The assembly shall include a black steel backbox (0.8-cu.ft.) with acoustic lining, leads exiting through a metal clamp, and four restraint tabs for code compliance tie-offs. The unit shall be made in the U.S.A. with global components.

LT / LT2 SERIES OVERVIEW

Model No.	Driver	Transformer	Taps	Enclosure	Grille	Volume Control	Listed	Driver Specs (measured half space)		
								Sensitivity*	Frequency Response	Dispersion**
LT-410-72-BB	4" 15W single cone	25V / 70V	.25, .5, 1, 2, 5W	.147 cu.ft.	1 x 2	---	---	90.8 dB	67Hz-16kHz (± 6 dB) 53Hz-20kHz (± 8 dB)	170°
LT-810	8" 15W dual cone	---	---	---	1 x 2	---	---	97.9 dB	54Hz-11.6kHz (± 6 dB) 50Hz-20kHz (± 6.6 dB)	95°
LT-810-72	8" 15W dual cone	25V / 70V	.25, .5, 1, 2, 5W	---	1 x 2	---	---	97.9 dB	54Hz-11.6kHz (± 6 dB) 50Hz-20kHz (± 6.6 dB)	95°
LT-810-BB	8" 15W dual cone	---	---	.147 cu.ft.	1 x 2	---	---	97.9 dB	54Hz-11.6kHz (± 6 dB) 50Hz-20kHz (± 6.6 dB)	95°
LT-810-425-BB	8" 15W dual cone	25V	.5, 1, 2, 4W	.147 cu.ft.	1 x 2	---	---	97.9 dB	54Hz-11.6kHz (± 6 dB) 50Hz-20kHz (± 6.6 dB)	95°
LT-810-72-BB	8" 15W dual cone	25V / 70V	.25, .5, 1, 2, 5W	.147 cu.ft.	1 x 2	---	---	97.9 dB	54Hz-11.6kHz (± 6 dB) 50Hz-20kHz (± 6.6 dB)	95°
LT-810-72-BB-VC	8" 15W dual cone	25V / 70V	.25, .5, 1, 2, 5W	.147 cu.ft.	1 x 2	Knob	---	97.9 dB	54Hz-11.6kHz (± 6 dB) 50Hz-20kHz (± 6.6 dB)	95°
LT2-810-BB	8" 15W dual cone	---	---	.147 cu.ft.	2 x 2	---	---	97.9 dB	54Hz-11.6kHz (± 6 dB) 50Hz-20kHz (± 6.6 dB)	95°
LT2-810-425-BB	8" 15W dual cone	25V	.5, 1, 2, 4W	.147 cu.ft.	2 x 2	---	---	97.9 dB	54Hz-11.6kHz (± 6 dB) 50Hz-20kHz (± 6.6 dB)	95°
LT2-810-72-BB	8" 15W dual cone	25V / 70V	.25, .5, 1, 2, 5W	.147 cu.ft.	2 x 2	---	---	97.9 dB	54Hz-11.6kHz (± 6 dB) 50Hz-20kHz (± 6.6 dB)	95°
LT2-810-72-BB-VC	8" 15W dual cone	25V / 70V	.25, .5, 1, 2, 5W	.147 cu.ft.	2 x 2	Knob	---	97.9 dB	54Hz-11.6kHz (± 6 dB) 50Hz-20kHz (± 6.6 dB)	95°
LT-830-BB	8" 20W coaxial	---	---	.147 cu.ft.	1 x 2	---	---	97.0 dB	57Hz-14kHz (± 6 dB) 44Hz-20kHz (± 7.6 dB)	80°
LT-830-870-BB	8" 20W coaxial	70V	1, 2, 4, 8W	.147 cu.ft.	1 x 2	---	---	97.0 dB	57Hz-14kHz (± 6 dB) 44Hz-20kHz (± 7.6 dB)	80°
LT2-830-T870-VB	8" 20W coaxial	70V	1, 2, 4, 8W	.8 cu.ft.	2 x 2	---	---	97.0 dB	57Hz-14kHz (± 6 dB) 44Hz-20kHz (± 7.6 dB)	80°
THIS SPEC  LT2-830-TM16-VB	8" 20W coaxial	70V	4, 8, 16W	.8 cu.ft.	2 x 2	---	---	97.0 dB	57Hz-14kHz (± 6 dB) 44Hz-20kHz (± 7.6 dB)	80°
LT-8A-VB	8" 50W coaxial	---	---	.8 cu.ft.	1 x 2	---	UL	90.6 dB	40Hz-19.4kHz (± 6 dB) 40Hz-20kHz (± 7.3 dB)	90°
LT-8A-T870-VB	8" 50W coaxial	70V	1.1, 2, 4, 8W	.8 cu.ft.	1 x 2	---	UL	90.6 dB	40Hz-19.4kHz (± 6 dB) 40Hz-20kHz (± 7.3 dB)	90°
LT2-8A-VB	8" 50W coaxial	---	---	.8 cu.ft.	2 x 2	---	UL	90.6 dB	40Hz-19.4kHz (± 6 dB) 40Hz-20kHz (± 7.3 dB)	90°
LT2-8A-T870-VB	8" 50W coaxial	70V	1.1, 2, 4, 8W	.8 cu.ft.	2 x 2	---	UL	90.6 dB	40Hz-19.4kHz (± 6 dB) 40Hz-20kHz (± 7.3 dB)	90°
LT2-8A-TM32-VB	8" 50W coaxial	70V	8, 16, 32W	.8 cu.ft.	2 x 2	---	---	90.6 dB	40Hz-19.4kHz (± 6 dB) 40Hz-20kHz (± 7.3 dB)	90°

* Average SPL @ 1W/1M

** Conical @ 2kHz octave (-6dB)