



Power strip with six NEMA 5-15R receptacles spaced for power supplies. Power cord is attached.

Compact power strip provides six (6) NEMA 5-15R receptacles in a 12" low profile chassis for convenient access to power in racks, cabinets and other small spaces.


### FEATURES:

- **Power Rating:** 120VAC, 60Hz, 15A
- **Chassis:** 12" x 1.5" x 1.625" steel chassis with black powder epoxy finish
- **Termination:** 6-ft. attached (non-removable) power cord with NEMA 5-15P molded plug
- **Receptacles:** Total of six (6) single NEMA 5-15R receptacles are spaced on 1.5" centers to accommodate power supplies (user should confirm spacing for their equipment).
- **Installation:** Screws can be used to mount to rear notches in a rackmount utility shelf (US Series, USV Series). Integral mounting "ears" at ends of strip offer additional mounting solutions.
- **Certification:** ETL Listed
- **Origin:** Made in U.S.A. with global components
- **A&E Specifications:** The ETL Listed power strip shall be Lowell model ACS-1506-WW, which shall have a power rating of 120VAC 60Hz, 15A. It shall feature six (6) NEMA 5-15R receptacles, spaced on 1.5" centers to accommodate power supplies, and a circuit breaker. The 12" x 1.5" x 1.625" chassis shall have integral mounting "ears" at the ends, and shall be certified U.S. steel with a black powder epoxy finish. Termination shall be via an attached 6-ft. cord with molded plug. The power strip shall be made in the U.S.A. with global components.

### COMPATIBLE EQUIPMENT: (order separately)

- **US Series:** 19" rackmount utility shelf with solid base has rear notches to mount a 12" power strip.
- **USV Series:** 19" rackmount utility shelf with vented base has rear notches to mount a 12" power strip.



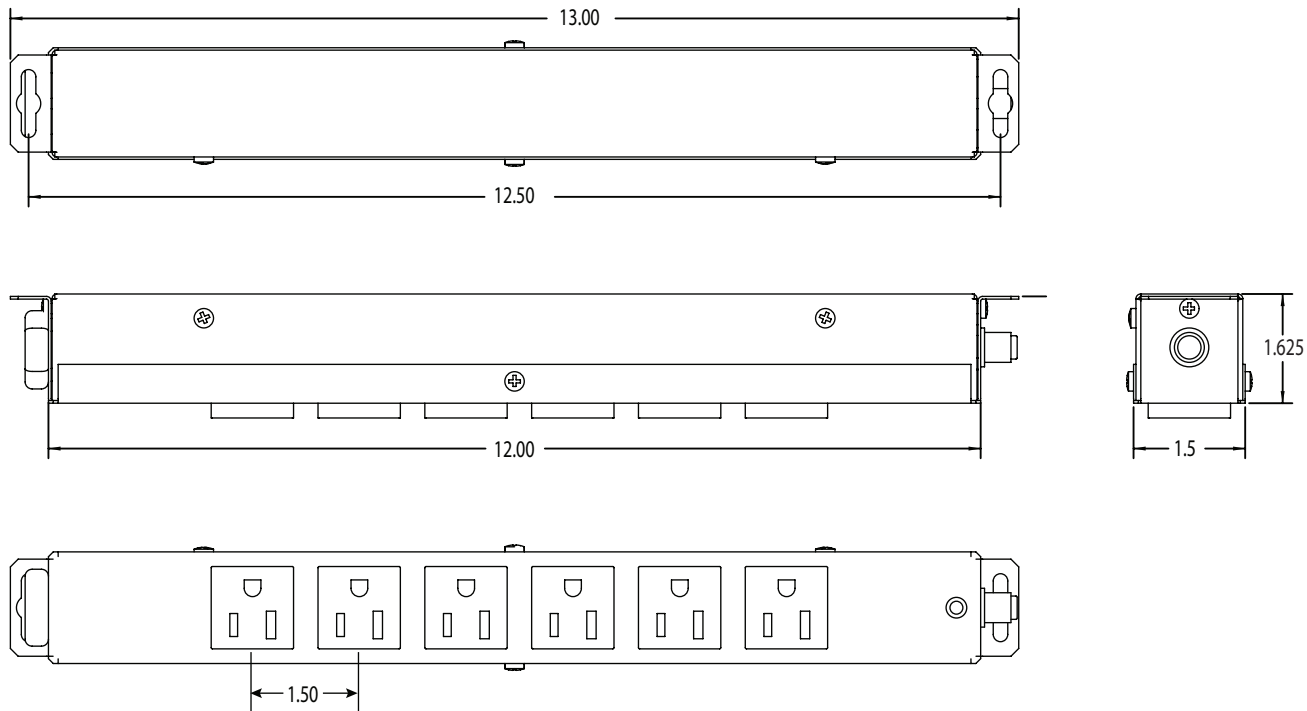

Measurements provided in inches unless noted otherwise.

### ACS Series Power Strips (overview)

This spec

Model No.	Power Rating	NEMA Receptacles	Circuits	Chassis Length	Chassis Profile	Termination	On/Off Switch	Surge Suppression	Remote Power Control	Mounting Aids	Country of Origin
ACS-1505-SW	15A	5 (15A)	1	12"	Standard	6' Det. cord	Yes	---	---	Brackets	U.S.
ACS-1505-SW-SD	15A	5 (15A)	1	12"	Standard	6' Det. cord	Yes	2-stage	---	Brackets	U.S.
ACS-1506	15A	6 (15A)	1	20"	Low	6' Fixed cord	---	1-stage	---	Clips	China
<b>ACS-1506-WW</b>	<b>15A</b>	<b>6 (15A)</b>	<b>1</b>	<b>12"</b>	<b>Low</b>	<b>6' Fixed cord</b>	<b>---</b>	<b>---</b>	<b>---</b>	<b>Screws</b>	<b>U.S.</b>
ACS-1507	15A	7 (15A)	1	12"	Low	6' Det. cord	---	---	---	Screws	U.S.
ACS-1512	15A	12 (15A)	1	32"	Low	12' Fixed cord	---	1-stage	---	Clips	China
ACS-1524	15A	24 (15A)	1	60"	Low	12' Fixed cord	---	1-stage	---	Clips	China
ACS-1524-2C	15A	24 (15A)	2	70"	Low	Pigtail leads	---	---	---	Clips	China
ACS-2012	20A	8 (15A) + 4 (20A)	1	32"	Low	12' Fixed cord	---	1-stage	---	Clips	China
ACS-2024	20A	16 (15A) + 8 (20A)	1	70"	Low	12' Fixed cord	---	1-stage	---	Clips	China
ACS-2014-HW	20A	14 (20A)	1	30"	Standard	6' Conduit	---	---	---	Brackets	U.S.
ACS-2014-2C-HW	20A	8 (15A) + 6 (20A)	2	30"	Standard	6' Conduit	---	---	---	Brackets	U.S.
ACS-2020-6C-HW	20A	20 (20A)	6	60"	Standard	6' Conduit	---	---	---	Brackets	U.S.
ACS-2020-IG-6C-HW	20A	20 (I.G. 20A)	6	60"	Standard	6' Conduit	---	---	---	Brackets	U.S.
ACS-2020-IG-10C-HW	20A	20 (I.G. 20A)	10	60"	Standard	6' Conduit	---	---	---	Brackets	U.S.
ACS-2024-2C	20A	24 (20A)	2	70"	Low	Pigtail leads	---	---	---	Clips	China
ACS-1510-RPC	15A	10 (15A)	1	30"	Standard	6' Det. cord	---	---	Yes	Brackets	U.S.
ACS-2010-RPC-HW	20A	10 (20A)	1	30"	Standard	6' Conduit	---	---	Yes	Brackets	U.S.
ACS-2018-5C-RPC-HW	20A	18 (20A)	5	60"	Standard	6' Conduit	---	---	Yes	Brackets	U.S.
ACS-2018-5C-RPCP-HW	20A	18 (20A)	5	60"	Standard	6' Conduit	---	1-stage	Yes (P)	Brackets	U.S.

Chassis Profile = Standard profile (2" x 2"), Low profile (1.625" x 1.375")

Termination = Det. cord (detachable cord), Fixed cord (cord is attached—cannot be removed), Conduit (non-metallic flexible whip w/pigtail leads), Pigtail leads (leads at ends of chassis—no whip)

Switch = Yes (On/off rocker switch)

Surge Suppression = 1-stage (basic surge protection), 2-stage (surge protection with backup)

Remote Power Control = Some receptacles are controlled by a remote switch or sequencer (ordered separately); (P) indicates compatibility with Lowell P-Series pass-through sequencers.

Mounting Aids = Brackets (multi-hole brackets with hardware), Clips (clips and screws with wire tires), or Screws (power strips can mount to rear of US or USV Series shelves).

