



INSTALLATION: Surface-mount

FOR: Clock/speaker center

Surface-mount enclosure model CTC-BXS is designed to hold the CTC Series modular clock/speaker center.

FEATURES:

- **Construction:** 18-gauge certified U.S. steel with white powder epoxy finish. Includes horizontal dividers.
- **Overall Dimensions:** 18.85" x 39.125"
- **Depth:** 3.063"
- **Channels:** Vertical wire channels for cable management on two sides
- **Knockouts:**
 - Wiremold knockouts
 - Rear knockouts
- **Acoustic Treatment:** Damping compound
- **Country of Origin:** Made in U.S.A.

A&E SPECIFICATIONS:





The modular speaker center shall be mounted to a surface-mount enclosure, Lowell model CTC-BXS, which shall be 18-gauge steel with white powder epoxy finish. It shall include horizontal dividers, vertical channels for wire on two sides, wiremold knockouts, and rear knockouts. Overall measurements shall be 18.85" x 39.125" x 3.063". The enclosure shall be made in the U.S.A.

COMPATIBLE COMPONENTS (order separately):

- Clock/Speaker Center (modular): CTC Series

CTC Backbox Series

Model No.	Format	Width	Length	Depth	Knockouts
CTC-BXR	Recessed	15.596	37"	3"	Top, bottom, rear
▶ CTC-BXS	Surface-mount	18.85"	39.125"	3.063"	Top, bottom, rear

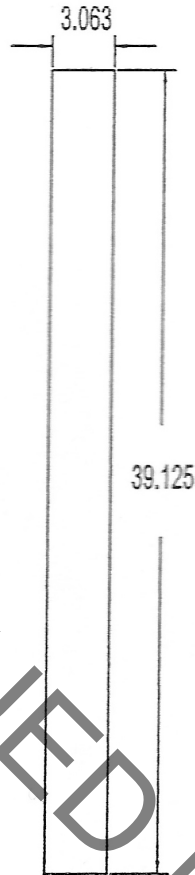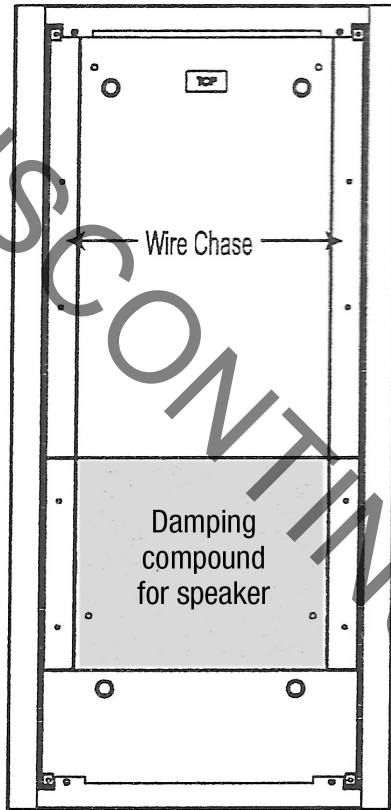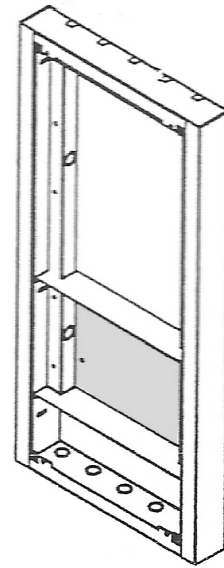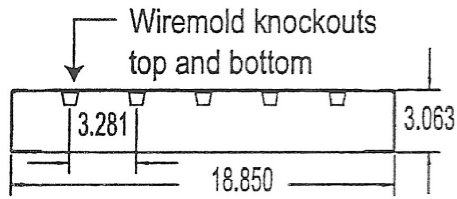

DISCONTINUED MODEL

