



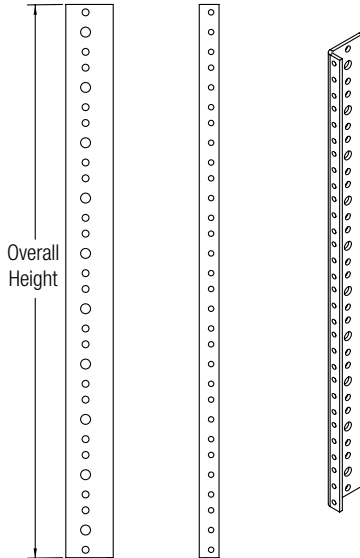

LHR-RRT series rails are tapped to accept threaded 10-32 screws (LHR-RRT-24 shown).



LHR-RRT rack rails fit the inner (pull-out) rack of LHR Host racks. The rack rails accept threaded 10-32 screws and feature a printed scale showing rack unit increments to aid set-up. The 1U position should be placed at the bottom of the rack to facilitate consistent loading of equipment.

### FEATURES

- For use with Lowell LHR Series
- 11-gauge U.S. steel
- Fixed hole positions
- Black powder epoxy finish
- Made in the USA with 100% certified US steel
- Printed RU increments to aid equipment mounting
- Includes mounting hardware
- Sold in pairs

### A & E SPECIFICATIONS

The LHR rack shall include a pair of rear mounting rails, Lowell Model LHR-RRT-\_\_\_\_ (24, 35, 44). The rails shall be fabricated from 11-gauge U.S. steel and have a black powder epoxy finish. Each rail shall measure \_\_\_\_ (24, 35, 44) rack units, be tapped on one side to accept threaded 10-32 screws, and feature a printed scale showing rack unit increments.

### LHR-RRT SERIES SUMMARY

Model No.	Description	Hardware Included	Overall Height in [mm]	RU	Quantity
LHR-RRT-24	Rear Mounting Rails for LHR Series rack, thin-flange	Y	42.00 [1067]	24U	1-pr.
LHR-RRT-35	Rear Mounting Rails for LHR Series rack, thin-flange	Y	61.25 [1556]	35U	1-pr.
LHR-RRT-44	Rear Mounting Rails for LHR Series rack, thin-flange	Y	77.00 [1956]	44U	1-pr.

One rack unit (RU or U) = 1.75 inches or 44.45 mm.

