



Flip-top allows access to upper bay without opening main compartment.

Model No.

RCCD-4628

Remote Consolidation Cabinet
4U horizontal-mount + 6U (21" D) vertical mount

Panel Space:	4U upper bay mounts equipment horizontally (4.97" D usable) 6U lower bay mounts equipment vertically (21" D usable)
Overall Height:	28.55" [725]
Overall Width:	25.5" [648]
Overall Depth (w/ door):	11.187" [284]
Load Capacity:	150 lbs.



LOW PROFILE WALL CABINET secures 19" EIA network equipment with minimal intrusion into room, maximizing space with two mounting bays. Includes deep front door which contributes to overall cabinet depth of 11.187".

FEATURES

CONSTRUCTION: 16-gauge USA-certified steel. Network-Grey powder-coat finish:

- **Upper Bay (horizontal-mount):** 4U x 19"W (4.97" usable depth). One-pair pivoting rails allows easy access to cables; secures with wing nuts. Ideal place for a shallow patch panel.
- **Lower Bay (vertical-mount):** 6U x 19"W (21" usable depth). One-pair adjustable rails. Ideal for a hub, server, or similar active equipment.

FRONT: Deep front door with vents, beveled edges, and hinged top that permits access to upper bay without opening main compartment. Top/side key locks. Door is reversible (left or right-hand swing).

REAR: Cabinet mounts on standard 16 inch centers and features large 4" x 7" cutouts to fit over wall obstructions. Multiple bridge lances for cable management.

SIDES: Combination EKO's for conduit (1/2"-3/4" and 1"-1-1/2"). Draw latch and key lock.

BOTTOM: Combination EKO's for conduit (1/2"-3/4"). Electrical box in base. Vents will accept optional single fan kit.


TOP: Combination EKO's for conduit (1/2"-3/4" and 1"-1-1/2").

CABLE MANAGEMENT: Multiple bridge lances in rear. Knockouts in top, bottom, and sides.

DUAL-PUNCH RAILS: 11-gauge steel rails with black finish have 10-32 threaded holes (for use with included screws) plus square holes (for use with alternate hardware—12-24 or 6mm screws, not included).

COMPLIANCE: EIA/TIA compliant. TAA compliant. BAA compliant

ORIGIN: Made in USA

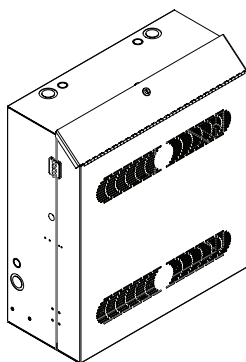

A&E SPECIFICATIONS

The wall-mount cabinet shall be Lowell Model RCCD-4628 with overall measurements of 25.5"W x 28.55"H x 11.187"D (with door), and two mounting bays within. The 4U upper bay shall have rails to mount an accessory panel horizontally and shall pivot down for access. The 6U lower bay shall have adjustable rails to mount 19" equipment vertically (up to 21"D). All rails shall be 11-ga. steel with black finish, and have 10-32 threaded holes (for use with included screws), plus square holes (for use with alternate hardware — 12-24 or 6mm screws, not included). The deep front door shall have a sloped top, beveled edges and vents. The cabinet shall have two access points with key locks—the top of the door shall flip down to access equipment in the upper bay without opening the main compartment, the door shall also open from the side for full access to cabinet interior. The cabinet shall include knockouts and bridge lances for cable management, and an electrical box in the base. The cabinet shall be manufactured in the USA using USA-certified steel and have a Network-Grey powder-coat finish. It shall be Trade Agreement Act (TAA) compliant and Buy American Act (BAA) compliant. Load capacity shall be 150 lbs.

OPTIONAL

- **FW1-KITT:** Single whisper-quiet fan (4.7" dia., 50cfm, 28dBA) with guard, 6' cord and integral thermostat probe to control fan operation
- **FDC1-KITT:** Single DC fan (4.7" dia., 73cfm, 33dBA) with guard, 6' cord and integral thermostat probe to control fan operation.

MODEL SUMMARY

Model No.	Upper Bay (horizontal-mount)*	Lower Bay (vertical-mount)*	Overall Height	Overall Width	Overall Depth	Upper Rails (pivoting)	Lower Rails (adjustable)	Load Capacity	Origin
RCCD-4628	4U x 19 x 4.97	6U x 19 x 21	28.5 [724]	25.5 [648]	11.19 [284]	1 pr	1 pr	150 lbs.	USA

*Rack dimensions (rounded) – inches and [mm]; 1U = 1.75"; *usable depth*

TECHNICAL DRAWINGS

Dimensions are inches and [mm] unless stated otherwise.

