

Model No.

WXR-2218

Slim Open-frame Wall-mount Rack with Fixed Rails

| | |
|-----------------|------------------|
| Panel Space: | 22U |
| Overall Height: | 42.28" [1074] |
| Usable Height: | 38.62" [981] |
| Overall Depth: | 18.00" [457] |
| Usable Depth: | 17.85" [453] |
| Overall Width: | 19.21" [488] |
| Load Capacity: | 175 lbs. [79 kg] |



SLIM OPEN-FRAME WALL RACK for mounting 19"W equipment to a wall or backboard. Top and base consist of heavy gauge steel that can be mounted on 16" centers to form a stable platform for patch panels, routers, switches, telecommunications, or computer equipment. The WXR keeps equipment organized in tight spaces with limited floor space.

FEATURES

CONSTRUCTION:

- Ships unassembled
- 14-gauge certified U.S. steel top/base
- Smooth black powder epoxy finish
- Upper and lower front vents
- Open sides with obrounds in top/base for easy cable management
- Opening in rear of top/base for cable runs

RACK RAILS – 22U: One pair 11-gauge corner post rails tapped 10-32. Bi-directional numbered RU increments allow rail installation in either directions

HARDWARE: Assembly and mounting hardware

COMPLIANCE: EIA/TIA compliant


A&E SPECIFICATIONS

The slim open-frame wall-mount rack shall be Lowell WXR-2218 with overall dimensions of 42.28"H x 18.00"D x 19.21"W and provides 22 rack units of panel space. Rack construction shall be 14-gauge top/base with 1-pr. 11-gauge corner post rails tapped 10-32 on E.I.A spacing – with smooth black powder epoxy finish. The rack shall be manufactured in the U.S.A. with certified U.S. steel. It shall have with a load capacity of 175 lbs. when properly mounted. It shall ship unassembled.




TECHNICAL DRAWINGS


Dimensions are inches and [mm] unless stated otherwise.

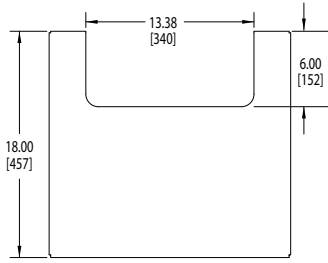


TOP

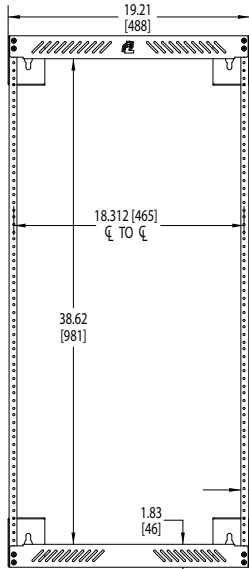


FRONT

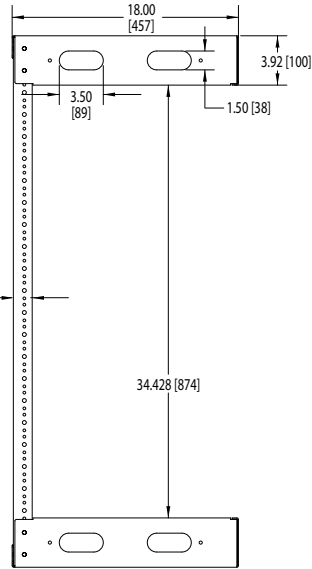



SIDE

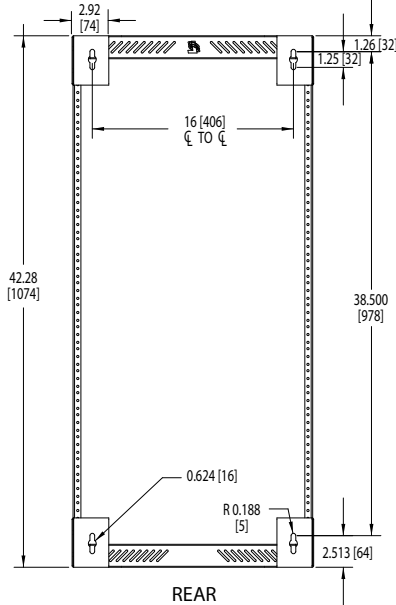

REAR

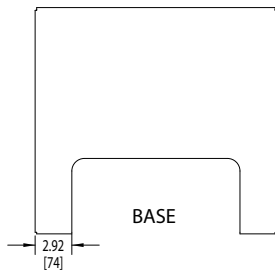

BASE

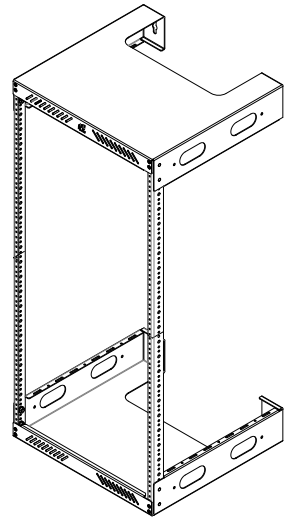

WXR SERIES SUMMARY

| Model No. | Rack Units | Overall Depth | Usable Depth | Overall Height | Usable Height | Overall Width | Top/Base Rear Opening | Corner Post Rails | Load Capacity |
|-----------|------------|---------------|--------------|----------------|---------------|---------------|--------------------------|-------------------|---------------|
| WXR-126 | 12 | 6.00 [152] | 5.85 [149] | 24.78 [629] | 21.12 [536] | 19.21 [488] | 13.38 [340] x 2.00 [51] | 2 | 200 |
| WXR-226 | 22 | 6.00 [152] | 5.85 [149] | 42.28 [1074] | 38.62 [981] | 19.21 [488] | 13.38 [340] x 2.00 [51] | 2 | 200 |
| WXR-812 | 8 | 12.00 [305] | 11.85 [301] | 17.75 [452] | 14.12 [359] | 19.21 [488] | 13.38 [340] x 6.00 [152] | 2 | 200 |
| WXR-1212 | 12 | 12.00 [305] | 11.85 [301] | 24.78 [629] | 21.12 [536] | 19.21 [488] | 13.38 [340] x 6.00 [152] | 2 | 200 |
| WXR-2212 | 22 | 12.00 [305] | 11.85 [301] | 42.28 [1074] | 38.62 [981] | 19.21 [488] | 13.38 [340] x 6.00 [152] | 2 | 175 |
| WXR-3012 | 30 | 12.00 [305] | 11.85 [301] | 56.28 [1430] | 52.62 [1337] | 19.21 [488] | 13.38 [340] x 6.00 [152] | 2 | 175 |
| WXR-818 | 8 | 18.00 [457] | 17.85 [453] | 17.75 [452] | 14.12 [359] | 19.21 [488] | 13.38 [340] x 6.00 [152] | 2 | 150 |
| WXR-1218 | 12 | 18.00 [457] | 17.85 [453] | 24.78 [629] | 21.12 [536] | 19.21 [488] | 13.38 [340] x 6.00 [152] | 2 | 150 |
| WXR-2218 | 22 | 18.00 [457] | 17.85 [453] | 42.28 [1074] | 38.62 [981] | 19.21 [488] | 13.38 [340] x 6.00 [152] | 2 | 175 |
| WXR-3018 | 30 | 18.00 [457] | 17.85 [453] | 56.28 [1430] | 52.62 [1337] | 19.21 [488] | 13.38 [340] x 6.00 [152] | 2 | 125 |

Rounded dimensions inches and [mm]; 1U = 1.75"

THIS SPEC