

Model No.

USM-110

Rack Utility Shelf w/Multiple Mounting Slots



Panel Space:	1U or 1.75" [44]
Overall Depth:	10.00" [254]
Overall Width:	19.00" [483]
Usable Width:	17.56" [446]
Load Capacity:	25 lbs. [11 kg]



STEEL UTILITY SHELF with MULTIPLE MOUNTING HOLES/SLOTS features a variety of tie-down points to accommodate small devices and non-rackmount components such as audio, video, switching, and remote power control modules. The shelf mounts to standard 19" E.I.A. compliant racks.

FEATURES

CONSTRUCTION: 16-gauge certified U.S. steel

FINISH: Smooth black powder epoxy finish

BASE: Unique hole and slot arrangement in base is designed to accommodate a variety of device mounting patterns, while contributing to enhanced ventilation.

FRONT/BACK: Open front and back (no flanges)


SIDES: Shelf sides feature slots to accommodate wires and cables.

COMPLIANCE: E.I.A./T.I.A.

ORIGIN: Made in the U.S.A.

COMPATIBILITY: With its variety of tie-down points and slots, this rackmount shelf is ideal for Lowell standalone remote power controls (RPC Series, RPC-P Series), sequencers (SEQ-4, SEQ-8, SEQ-P4), and relays (RY-2A, RY-4A, RY-P1, RY-P2), as well as a variety of similar devices.

MULTI-PACK CARTONS: Cartons of (12) twelve or (50) fifty shelves are available. See series summary chart on next page.

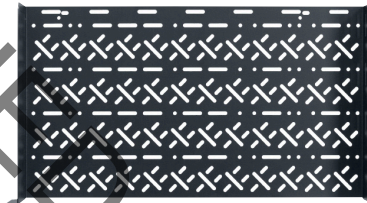

Top view



Available in multi-pack contractor cartons.

A&E SPECIFICATIONS

The 1U rackmount utility shelf with multiple mounting slots in the base shall be Lowell model USM-110. It shall be 16-gauge certified U.S. steel construction with a smooth black powder epoxy finish. The base shall feature multiple holes and slots to provide tie-down positions for a variety of small devices and modules. The sides shall feature slots, while the front and back shall be open (no flanges). Overall shelf dimensions shall be 19"W x 10"D x 1.75". The shelf shall be made in the U.S.A. and have a load capacity of 25 lbs.

USM SERIES SUMMARY

THIS SPEC

Model No.	Panel Space	Overall Width	Useable Width	Overall Depth	Overall Height	Load Capacity	Material	Quantity
USM-110	1 U	19.00 [483]	17.56 [446]	10.00 [254]	1.72 [44]	25 lbs. [11 kg]	16-ga. steel	1
USM-110CC	1 U	19.00 [483]	17.56 [446]	10.00 [254]	1.72 [44]	25 lbs. [11 kg]	16-ga. steel	12 pk
USM-110MC	1 U	19.00 [483]	17.56 [446]	10.00 [254]	1.72 [44]	25 lbs. [11 kg]	16-ga. steel	50 pk
USM-210	2 U	19.00 [483]	17.56 [446]	10.00 [254]	3.47 [88]	25 lbs. [11 kg]	16-ga. steel	1
USM-210CC	2 U	19.00 [483]	17.56 [446]	10.00 [254]	3.47 [88]	25 lbs. [11 kg]	16-ga. steel	6 pk

Dimensions = inches [mm]; 1U = 1.75"

TECHNICAL DRAWINGS

Dimensions are inches and [mm] unless stated otherwise.

