



Model FW3-3

Ready-to-install rackmount panel with whisper-quiet fans includes a standard cord.

FEATURES

- 16 gauge steel panel with black powder epoxy finish measures 19"W x 2"D x 3U
- Three mounted fans with guards
 - 4.7" fan diameter
 - 50 cfm airflow rating (per fan)
 - 28 dBA noise rating (per fan)
 - 5.5 watts power required (per fan)
- Standard (black) 6-ft. cord with plug
- Fan Orientation: Exhaust* (pulls air out of cabinet)
 - * NOTE: Fans can be field-changed to intake (force air into cabinet)
- Made in the U.S.A. with domestic/imported components.

OPTIONAL

- FW-FF: fan filter

A&E SPECIFICATIONS

The thermal management panel for E.I.A. rackmount installation shall be Lowell Model No. FW3-3, which shall be 16 gauge U.S. steel finished in black powder epoxy paint. It shall measure 3U x 19"W and include 3 whisper fans with guards. Each fan shall have a 4.7" diameter with 50 cfm airflow and 28 dBA noise rating. The panel shall include a 6-ft. cord with plug.



Optional: Fan filter, model FW-FF.

SERIES OVERVIEW


Model No.	Description	Rack Units	Panel Height	Fan Quantity	Total Airflow	Total Noise Rating	Power Required (120VAC 60Hz)	Cord Color	Thermostat
FW2-3	Fan Panel	3	5.25"	2	100cfm	31dBA	11 watts	black	---
FW3-3	Fan Panel	3	5.25"	3	150cfm	33dBA	16.5 watts	black	---
FW4-7	Fan Panel	7	12.25"	4	200cfm	34dBA	22 watts	black	---
FW2-3T	Fan Panel	3	5.25"	2	100cfm	31dBA	11 watts	green	built into cord
FW3-3T	Fan Panel	3	5.25"	3	150cfm	33dBA	16.5 watts	green	built into cord
FW4-7T	Fan Panel	7	12.25"	4	200cfm	34dBA	22 watts	green	built into cord

Optional


FW-FF	Fan filter
-------	------------

One rack unit (RU or U) = 1.75 inches or 44.45 mm. Some measurements may have been rounded.



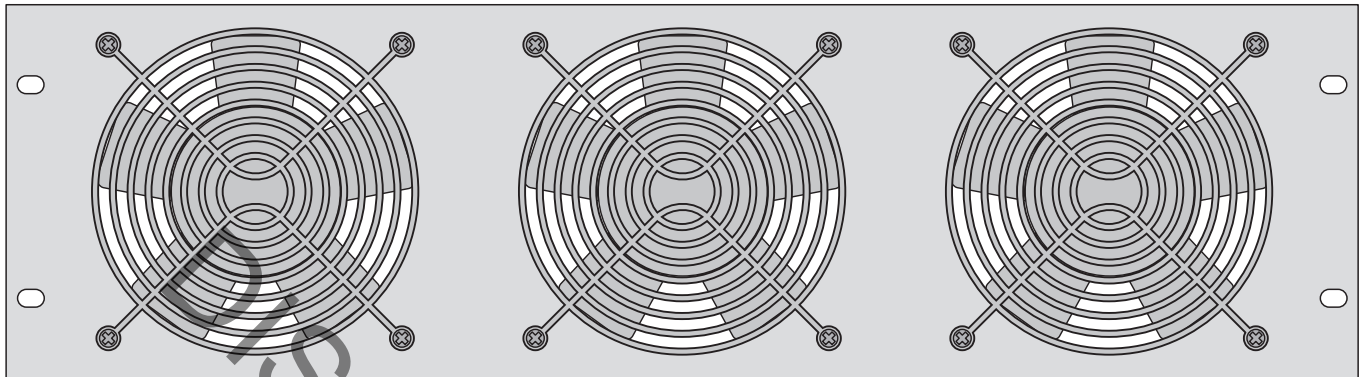

Front View

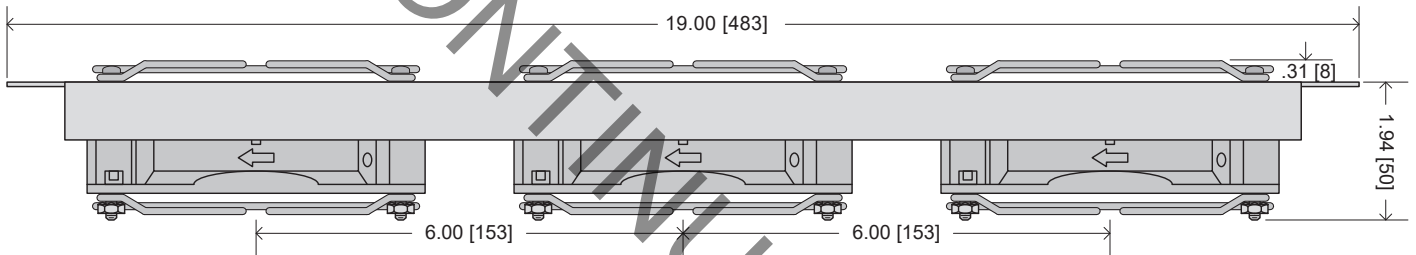

Bottom View

DISCONTINUED MODEL

