



LRND-54FV

The fully-vented, steel rear door is made for use with Lowell narrow series: LGTR. The full-vent pattern allows enhanced front-to-rear air flow when the rack features a fully-vented front door or open front. The fully-vented rear door is ideal for racks loaded with electronics, like amplifiers or servers, that have self-contained cooling fans.

FEATURES

- Construction:
 - Fully-vented steel with black wrinkle powder epoxy finish
 - 94.439"H x 19.423"W x .687"D
 - Integral recessed handle
 - Keyed lock (keyed differently than front door)
 - Made in the U.S.A. with certified U.S. steel
- Mounting: Mounts with right- or left-hand swing (field changeable) with spring-loaded hinge pins.
- Optional: (order separately)
 - Keyless Latch: Model TLK thumb latch replaces key lock, enabling the door to stay closed without locking it.

ORDERING

To order the rack with the fully-vented rear door instead of a standard rear door, order the "LRD" rack model (less rear door), then order the fully-vented rear door separately.

A & E SPECIFICATIONS


The rear door shall be Lowell Model LRND-54FV, which shall be steel with black wrinkle powder epoxy finish. The door shall be fully-vented. It shall mount with left- or right-swing, using spring-loaded hinge pins. The door shall feature a recessed handle and key lock.

SERIES OVERVIEW

Model No.	Description	Rack Panel Space	Overall Height	Overall Width	Overall Depth
LRND-40FV	Fully-vented, steel rear door for LGNR, and LGVR narrow racks	40U	69.875 [1775]	19.423 [493]	.687 [17]
LRND-44FV	Fully-vented, steel rear door for LGNR, and LGVR narrow racks	44U	76.937 [1954]	19.423 [493]	.687 [17]
▶ LRND-54FV	Fully-vented, steel rear door for LGTR narrow racks	54U	94.439 [2399]	19.423 [493]	.687 [17]

1 rack unit = 1.75 in. [44.45 mm]



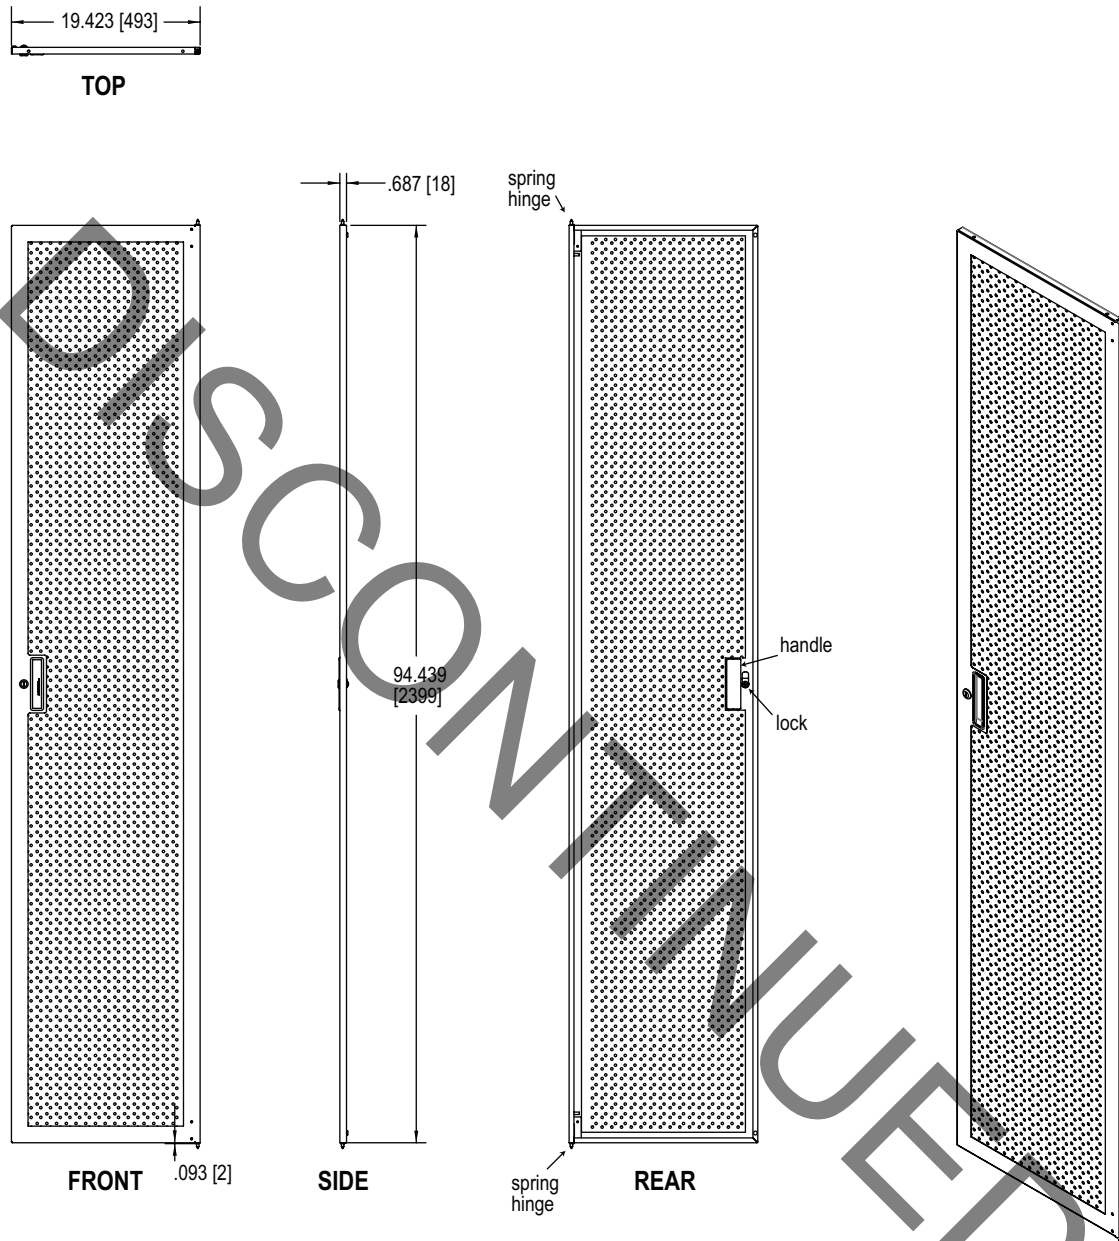

NOTE: The perf pattern shown here is for visual representation only. For actual pattern see photo on page 1.

