




# RRT Series

## Rack Rails for Custom Millwork

Mounting rails designed to accommodate 19.062" [484mm] openings in custom millwork. The rails are tapped to accept threaded 10-32 screws for mounting accessories to rack front. The opposite side of rail can be used to manage wires and cables. Rails are made from sturdy 11-gauge steel and have a smooth-black powder-coat finish with a printed RU scale showing rack unit increments to facilitate set-up.

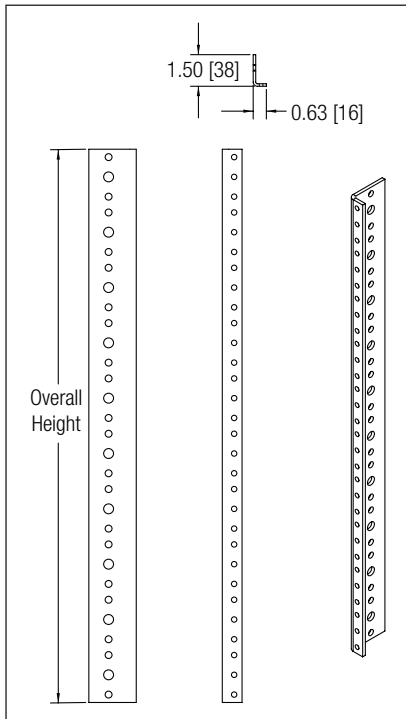

## FEATURES

**MATERIAL:** 11-gauge USA-certified steel

**FINISH:** Smooth-black powder-coat finish

**ORIGIN:** Made in the USA

**FOR USE IN:** 19.062"W [484mm] openings in custom millwork

**QUANTITY:** Sold in pairs

**MOUNTING HARDWARE:** NOT INCLUDED

**COMPLIANCE:** TAA compliant, BAA compliant

## A&E SPECIFICATIONS

Rack rails for use in custom millwork shall be Lowell Model \_\_\_\_\_ (see chart). The rails shall be fabricated from 11-gauge steel. Each rail shall measure \_\_\_\_\_ (see chart) rack units and be tapped on one side to accept threaded 10-32 screws (not included). Rails shall also feature a printed scale showing rack unit increments on spacing. They shall be manufactured in the USA using USA-certified steel and have a smooth-black powder-coat finish. Rails shall be Trade Agreement Act (TAA) compliant and Buy American Act (BAA) compliant.

RRT series rails are tapped to accept threaded 10-32 screws.

## RRT SERIES SUMMARY

Model No.	Description	Hardware Included	Overall Height (in [mm])	RU	Quantity
RRT-7	Rack Rails , thin-flange	---	12.25 [311]	7U	1-pr.
RRT-10	Rack Rails , thin-flange	---	17.50 [445]	10U	1-pr.
RRT-12	Rack Rails , thin-flange	---	21.00 [533]	12U	1-pr.
RRT-14	Rack Rails , thin-flange	---	24.50 [622]	14U	1-pr.
RRT-16	Rack Rails , thin-flange	---	28.00 [711]	16U	1-pr.
RRT-21	Rack Rails , thin-flange	---	36.75 [933]	21U	1-pr.

One rack unit (RU or U) = 1.75 inches or 44.45 mm.