



# LHR-RRT Series

## Rear Mounting Rails for LHR Host Rack

LHR-RRT rack rails fit the inner (pull-out) rack of LHR Host racks. The rack rails accept threaded 10-32 screws and feature a printed scale showing rack unit increments to aid set-up. The 1U position should be placed at the bottom of the rack to facilitate consistent loading of equipment.



## FEATURES

**MATERIAL:** 11-gauge, 100% certified US steel

**FINISH:** Black powder coat finish

**RAILS:** Tapped 10-32 on EIA spacing with printed bi-directional numbered RU increments (rails mount in either direction).

**ORIGIN:** Made in the USA

**FOR USE IN:** Lowell LHR Series host racks

**QUANTITY:** Sold in pairs

**MOUNTING HARDWARE:** Included


## A&E SPECIFICATIONS

The LHR rack shall include a pair of rear mounting rails, Lowell Model LHR-RRT-\_\_\_\_ (35, 44). The rails shall be fabricated from 11-gauge U.S. steel and have a black powder epoxy finish. Each rail shall measure \_\_\_\_ (35, 44) rack units, be tapped on one side to accept threaded 10-32 screws, and feature a printed scale showing rack unit increments.

## LHR-RRT SERIES SUMMARY

Model No.	Description	Hardware Included	Overall Height (in [mm])	RU	Quantity
LHR-RRT-35	Rear Mounting Rails for LHR Series rack, thin-flange	Y	61.25 [1556]	35U	1-pr.
LHR-RRT-44	Rear Mounting Rails for LHR Series rack, thin-flange	Y	77.00 [1956]	44U	1-pr.

One rack unit (RU or U) = 1.75 inches or 44.45 mm.

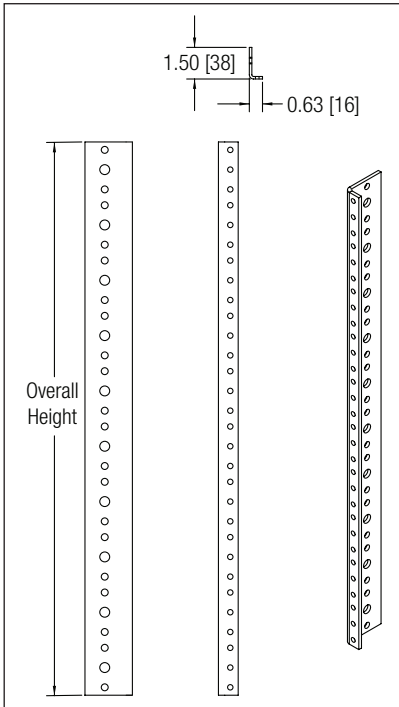

LHR-RRT series rails are tapped to accept threaded 10-32 screws.