

Model No.

CSV

Vandal-Resistant Call Switch

Overall Height: 4.50"

Overall Width: 2.75"

Overall Depth: 1.17"



VANDAL-RESISTANT CALL SWITCH FOR INTERCOM SYSTEMS—general purpose signaling and switching—includes heavy duty stainless steel wall plate, vandal-resistant screws and driver bit.

FEATURES

SWITCH:


- SPST (single pole, single throw)
- Rating: 2A 48VDC
- Function: Momentary (normally open)
- Connections: Screw terminal connections

WALL PLATE:

- Heavy duty 11-gauge stainless steel wall plate with brushed finish
- Size: 1-gang
- Standard silver push button
- Includes vandal-resistant screws with driver bit

COMPLIANCE: TAA compliant

ORIGIN: Made in USA with US and global components

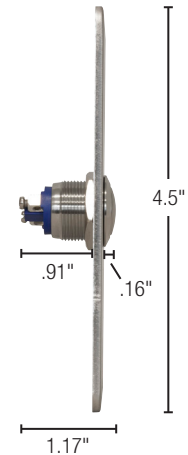

A&E SPECIFICATIONS

The vandal-resistant call switch shall be Lowell CSV, which shall be a single-pole single-throw (SPST) momentary (normally open) switch. The switch rating shall be 2A 48VDC. The switch shall be mounted in a one-gang 11-gauge stainless steel wall plate with brushed finish. The plate shall feature a standard silver push button. The unit shall include vandal-resistant screws and a driver bit.

MODEL SUMMARY

Model No.	Description	Wall Plate	Overall Height	Overall Width	Overall Depth	Push Button
CSV	Call switch	1-gang	4.5"	2.75"	1.17"	silver

ACCESSORY (order separately)

The switch shall include a one-gang, surface-mount, USA-certified, 20-gauge steel wall box with white powder-coat finish, Lowell P1X. The box shall measure 4.625"H x 2.875"W x 2.5"D. It shall feature 0.5" side and rear knockouts.



One-gang surface-mount wall box (P1X), order separately.