



Wall unit can be installed to mount equipment from side or top.

SMR Series

Side/Vertical Wall-mount Enclosure

Rack Units:	2U, or 4U
Panel Space:	3.92" [100], or 7.176" [182]
Overall Dimensions:	19.307" [490] x 21.625" [549]
Load Capacity:	50 lbs.

Low-profile wall-mount enclosure for small installations with limited space. Ideal for switches, hubs and similar network equipment holding it sideways or vertically, depending on how unit is mounted to wall. Includes removable front cover.



Wall unit with front cover removed shows bridge lances on back panel.

FEATURES

CONSTRUCTION: 16-gauge USA-certified steel with smooth-black powder-coat finish. Maximum usable depth is 19".

FRONT: Removable steel cover secures with screws to protect equipment, while allowing access for servicing.

BACK: Bi-directional keyhole slots on standard 16" mounting centers allow horizontal or vertical orientation of rack so equipment can be mounted from the side or top.

OPEN ACCESS SIDES: Two sides are open to access equipment and cables.

VENTED SIDES: Two sides are vented to allow passive ventilation.

CABLE MANAGEMENT: Bridge lances on the extended back panel provide attachment points to manage and secure cables.

RACK RAILS (adjustable): One-pair of 11-gauge steel 10-32 threaded rails can be repositioned in 1.5" depth increments to accommodate equipment and/or cables.

COMPLIANCE: EIA/TIA, Trade Agreements Act (TAA), and Buy American Act (BAA) compliant.

COUNTRY OF ORIGIN: Made in USA

A&E SPECIFICATIONS

The wall-mount rack shall be Lowell Model SMR-____, which shall be 16-gauge steel construction. Overall measurements shall be 21.625" x 19.3" x _____", which shall provide ____ rack units of panel space. The rear of the rack shall feature bi-directional keyhole slots on standard 16" mounting centers to facilitate mounting the rack to a wall either vertically or horizontally, allowing top- or side-mounted equipment. The rack shall feature vents on two sides, one-pair adjustable 11-gauge steel rails tapped 10-32, and multiple bridge lances on the extended back panel for cable management. The rack shall include a removable front cover secured with screws. It shall have a load capacity of 50 lbs. The rack shall be manufactured in the USA using USA-certified steel and have a smooth-black powder-coat finish. It shall be EIA/TIA, Trade Agreement Act (TAA), and Buy American Act (BAA) compliant.

SERIES SUMMARY


Model No.	"A" Rack Units	"B" Panel Space	Overall Dimensions	Load Capacity	Adj. Rails
SMR-2	2U	3.920 [100]	19.307 [490] x 21.625 [549]	50 lbs	1 pr
SMR-4	4U	7.176 [182]	19.307 [490] x 21.625 [549]	50 lbs	1 pr

Rack dimensions (rounded) – inches and [mm]; 1U = 1.75"

TECHNICAL DRAWINGS

Dimensions: inches [mm] unless stated otherwise.

SMR-2

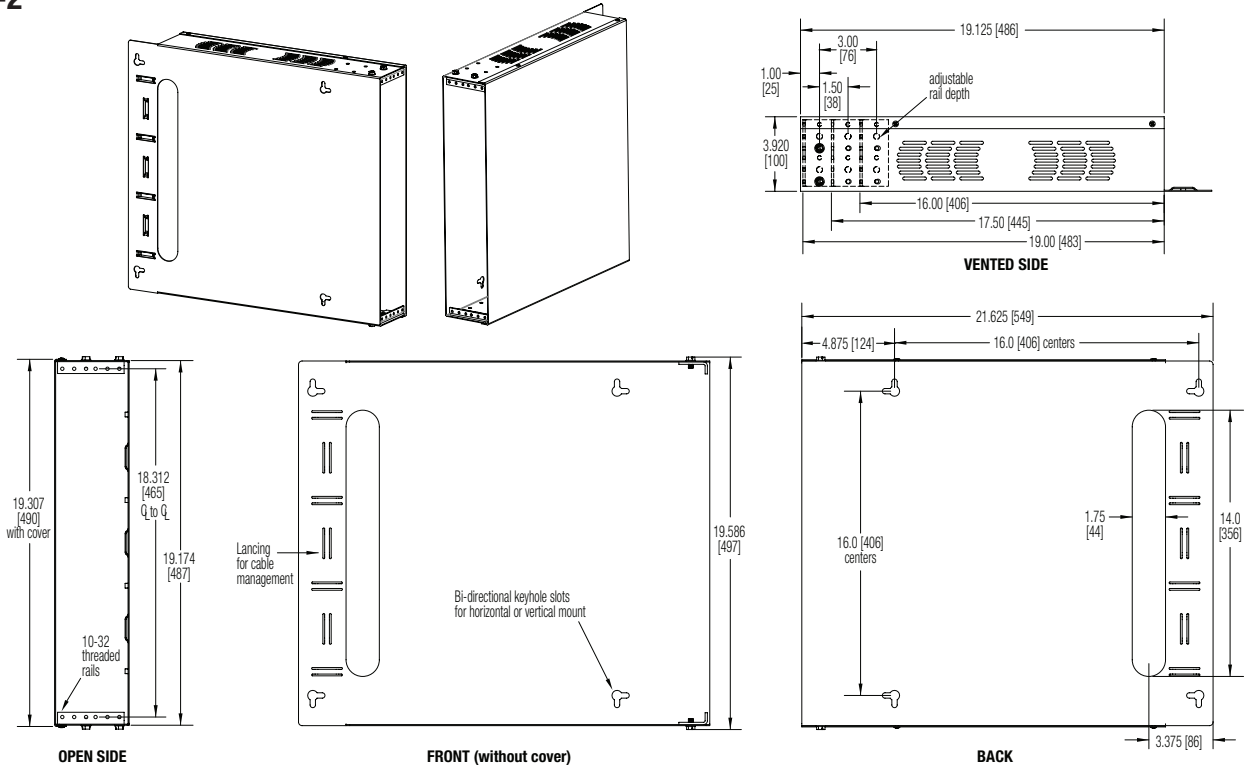

SMR-4

