

# FLEXIBLE CONDUIT & ES SERIES SPEAKERS

## Larger Models:

#ES-82T • #ES-82CDT • #ES-8TSUB



Rear removable entry plate with included 1/2" Romex connector.

### WHAT YOU WILL NEED:

- Flexible conduit
- 1/2" fitting (rated to attach flexible conduit)
- Phillips head screwdriver


### HOW TO ATTACH FLEXIBLE CONDUIT:

- 1) Remove 1/2" Romex connector from removable cable entry plate
- 2) Replace with 1/2" flexible conduit fitting (furnished by installer)

NOTE: For second flexible conduit to wire connecting speakers in a string:  
1) Remove knock-out from removable cable entry plate  
2) Replace with second 1/2" flexible conduit fitting (furnished by installer)

## Smaller Models:

#ES-4T • #ES-52T • #ES-62T

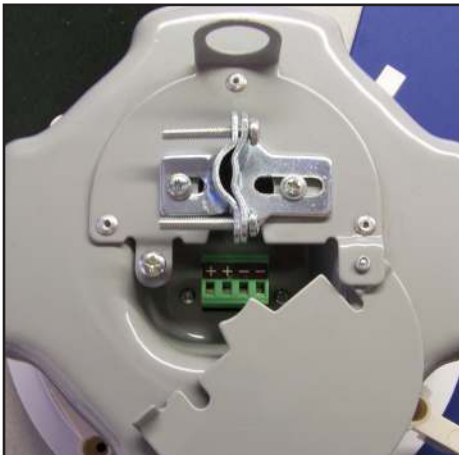

Rear entry plate with included squeeze connector.

### WHAT YOU WILL NEED:

- Flexible conduit
- 1/2" fitting (rated to attach flexible conduit)
- Phillips head screwdriver

### HOW TO ATTACH FLEXIBLE CONDUIT:

- 1) Remove squeeze connector from cable entry plate
- 2) Install 1/2" flexible conduit fitting (furnished by installer) into 1/2" fitting hole provided.



1/2" fitting hole shown after squeeze connector has been removed.

NOTE: The squeeze connector provides strain-relief for cables feeding into the speaker and out to the next speaker in a string.