

Decora® style cutouts (with covers) allow access to (optional) mounted switches without opening the rack.



LPSR-1226



Laminate top included with model no. LPSR-1226GT

Application

The LPSR is ideal for use as an under desk studio rack. The 15° sloped front allows easy viewing of electronic controls from a seated position at a desk, while the swivel casters provide convenient rollout access.

Construction

Made in the U.S.A. with fully welded 18-ga. certified U.S. steel, reinforced at all load-bearing junctions. Load capacity 250 lbs. Black wrinkle powder epoxy finish.

What's Included ?


- Top** Steel top. Optional laminate top has rounded corners, rubber edge molding and a Graphite Grey premium finish. Made to slightly overhang steel top. (23.75" x 20.25" x 1").
- Base** Solid base with four swivel casters for rollout access.
- Front Door** Hideaway front door with keyed lock and vents opens from top and slides into base for storage.
- Rear Access Cover** Removable rear access cover with keyed lock opens from top. Keyed differently than front door. Includes two cable entry ports.
- Welded Sides** Welded sides have top and bottom vents for passive ventilation. Recessed handles.
- Fixed Rails** Front mounting rails (tapped 10-32) remain in factory-mounted position. Printed RU scale facilitates gear-mounting. Rack has rear mounting holes punched on E.I.A. spacing that include 10-32 Tinnerman clips.
- Cable Management** Two cable entry ports in rear door.
- Thermal Management** Vented sides and front door.
- Hardware** PilotPoint™ screws with captive washers.

Certification & Compliance

EIA/TIA
COMPLIANT



Technical

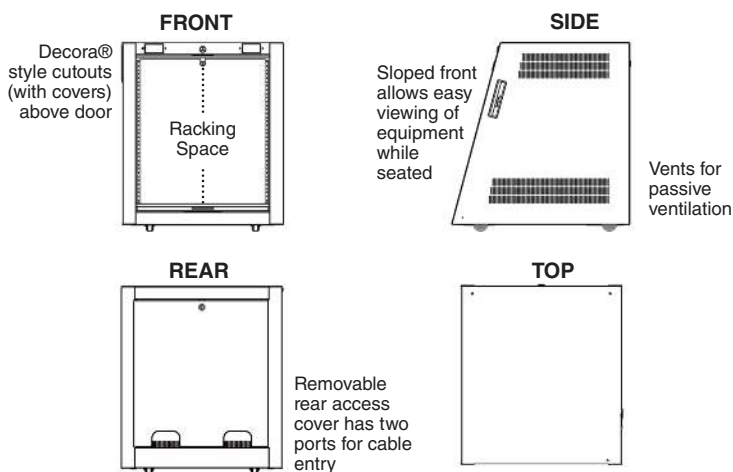

Model Numbers

Rack Model No.	Overall Depth	Racking Space	Overall Height*	Overall Width*	Load Capacity	Laminate Top*
LPSR-1226	25.52"	12U angled	26.88"	23.00"	250 lbs.	---
LPSR-1226GT	26.52"	12U angled	27.88"	23.75"	250 lbs.	yes

*Rack depth measured at base is 25.52". Measurements for Model No. LPSR-1226GT include laminate top which overhangs steel top, slightly increasing overall width and depth. Height shown includes 0.89" for casters. See online spec sheet for more information.